

ROADX

RXMOTION 4S

ALL WEATHER TIRE

The RXMOTION 4S ALL-WEATHER delivers a dependable, comfortable and safe ride in all weather conditions. Designed for drivers who only want to use one set of tires all year round, the 4S ALL-WEATHER, offers more traction than all-season tires in the winter months while still providing a comfortable ride in the hot summer months. The sophisticated compound and advanced tread pattern make this the perfect tire for daily commuting all-year-round.

FEATURES & BENEFITS

CERTIFIED ALL-WEATHER PERFORMANCE

- All weather tread design achieving 3PMS certification. Proprietary rubber compounds with 3D siping ensures premium traction.

HYBRID TREAD PATTERN

- The asymmetrical all-weather tread pattern is designed to deliver excellent handling by effectively evacuating water, slush and snow to ensure that more of the tire contacts the road in every season.

SUPERIOR TRACTION

- Reinforced and strengthened casing ensures even and consistent traction by increasing rigidity to minimize tread squirm in high-speed and cornering scenarios.


Le RXMOTION 4S ALL-WEATHER offre une conduite fiable, confortable et sûre dans toutes les conditions météorologiques. Conçu pour les conducteurs qui ne souhaitent utiliser qu'un seul jeu de pneus toute l'année, le 4S ALLWEATHER offre plus de traction que les pneus toutes saisons pendant les mois d'hiver tout en offrant une conduite confortable pendant les chauds mois d'été. Le composé sophistiqué et la bande de roulement avancée en font le pneu parfait pour les trajets quotidiens tout au long de l'année.

CARACTÉRISTIQUES

- Conception de bande de roulement tous temps atteignant la certification 3PMS. Les composés de caoutchouc exclusifs avec lamelles 3D assurent une traction de qualité supérieure.
- La bande de roulement asymétrique toutes saisons est conçue pour offrir une excellente maniabilité en évacuant efficacement l'eau, la gadoue et la neige pour garantir qu'une plus grande partie du pneu entre en contact avec la route à chaque saison.
- La carcasse renforcée et assure une traction uniforme et constante en augmentant la rigidité pour minimiser le tortillement de la bande de roulement dans les scénarios à grande vitesse et dans les virages scénarios.



PERFORMANCE RATINGS:

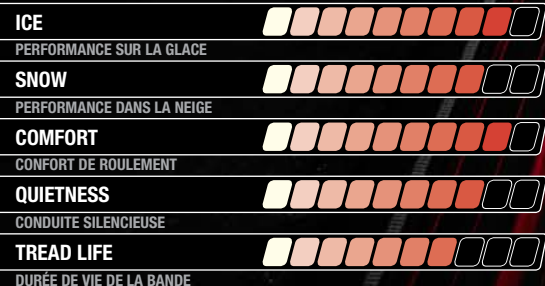

H, T AND V SPEED RATED
UTQG 300 AA

INDICES DE VITESSE H, T ET V
300 AA UTQG

ROADX

RXMOTION 4S



PART NUMBER	SIZE	LI/SR	TD 32/IN.	OD IN.	SW IN.	RW IN.	UTQG	SINGLE MAX LOAD LBS@PSI
5544782	155/70R13	75T	10	21.6	6.2	4.5	300 A A	853@44
5544786	155/80R13	79T	11	22.8	6.2	4.5	300 A A	963@44
5544776	155/65R14	75T	11	22.0	6.2	4.5	300 A A	853@44
5544787	165/60R14	79H XL	11	21.8	6.7	5.0	300 A A	963@50
5544784	165/65R14	79T	11	22.4	6.7	5.0	300 A A	963@44
5544778	165/70R14	85T XL	11	23.2	6.7	5.0	300 A A	1135@50
5544770	175/65R14	82T	11	23.0	7.0	5.0	300 A A	1047@44
5544788	175/70R14	88T XL	11	23.7	7.0	5.0	300 A A	1102@44
5544779	185/60R14	72T	11	22.8	7.4	5.5	300 A A	1047@44
5544783	185/65R14	86T	11	23.5	7.4	5.5	300 A A	1168@44
5544790	175/65R15	84H	11	24.0	7.0	5.0	300 A A	1102@44
5544791	185/55R15	82H	11	23.0	7.6	6.0	300 A A	1047@44
5544774	185/60R15	88H XL	11	23.7	7.4	5.5	300 A A	1235@50
5544773	185/65R15	92T	11	24.4	7.4	5.5	300 A A	1235@44
5544780	195/50R15	82H	11	22.7	7.9	6.0	300 A A	1047@44
5544781	195/55R15	85H	11	23.4	7.9	6.0	300 A A	1135@44
5544777	195/60R15	88H	11	24.2	7.9	6.0	300 A A	1235@44
5544775	195/65R15	91H	11	25.0	7.9	6.0	300 A A	1356@44
5042059	195/55R16	91V	11	24.4	7.9	6.0	300 A A	1356@50
5544793	205/45R16	87V XL	11	23.2	8.1	7.0	300 A A	1201@50
5544771	205/55R16	94V XL	11	24.9	8.4	6.5	300 A A	1477@50
5544794	205/60R16	96V XL	11	25.7	8.2	6.0	300 A A	1565@50
5544795	215/55R16	97V XL	11	25.3	8.9	7.0	300 A A	1609@50
5544796	215/60R16	99V XL	11	26.1	8.7	6.5	300 A A	1709@50
5544797	225/55R16	99V XL	11	25.7	9.2	7.0	300 A A	1709@50
5544798	205/50R17	93V XL	11	25.1	8.4	6.5	300 A A	1433@50
5042207	215/55R17	94V	11	26.3	8.9	7.0	300 A A	1477@44
5042060	225/45R17	94Y XL	11	25.0	8.9	7.5	300 A A	1477@50
5042061	225/50R17	98Y XL	11	25.9	9.2	7.0	300 A A	1653@50
5042194	225/65R17	102H	11	28.5	9.0	6.5	300 A A	1874@44
5042208	235/65R17	108H XL	11	29.1	9.4	7.0	300 A A	2205@50
5042209	235/60R18	107H XL	11	29.1	9.5	7.0	300 A A	2149@50
5042194	225/65R17	102H	11	28.5	9.0	6.5	300 A A	1874@44
5042208	235/65R17	108H XL	11	29.1	9.4	7.0	300 A A	2205@50
5042209	235/60R18	107H XL	11	29.1	9.5	7.0	300 A A	2149@50