

ROADX

RXQUEST HT HX01

PERFORMANCE HT/CUV/SUV

The ROADX RXQuest HT HX01 is the ultimate premium highway terrain tire for light trucks, providing unbeatable performance, outstanding traction, and exceptional durability. The RXQuest HT is available in 26 sizes P-metric and LT, with a mileage warranty of 80,000 kilometers.

FEATURES & BENEFITS

HANDLING AND TRACTION

Proprietary rubber compounds with optimized wide tread surface design aid in predictable handling and excellent braking performance.

DURABILITY

Tie-bar design in the shoulder lateral groove increase ride stability and aids in reducing irregular wear.

COMFORT

Void angles between lugs are designed for smooth air flow that effectively reduces noise during high-speed driving. Multiple siping per tread block enhance tread rigidity reducing road impact and providing increased ride comfort.

Le ROADX RXQuest HT HX01 est le pneu de route haut de gamme par excellence pour les camionnettes, offrant des performances imbattables, une traction remarquable et une durabilité exceptionnelle. Le RXQuest HT est offert en 26 tailles pour voiture de tourisme et camionnette, avec une garantie de 80 000 kilomètres.

CARACTÉRISTIQUES

TENUE DE ROUTE ET TRACTION

Les composés de caoutchouc exclusifs et la conception de la large surface de contact de la bande de roulement optimisée aident à offrir une tenue de route prévisible et une excellente performance de freinage.

DURABILITÉ


La conception des ponts de gomme des rainures latérales d'épaulement offre une stabilité de conduite accrue et contribue à réduire l'usure irrégulière.

CONFORT

Les angles de vide entre les sculptures sont conçus pour permettre une circulation fluide de l'air réduisant efficacement le bruit lors de la conduite à grande vitesse. Les multiples lamelles des pavés rehaussent la rigidité de la bande de roulement, réduisant les chocs et procurant un confort de conduite amélioré.



PERFORMANCE RATINGS:

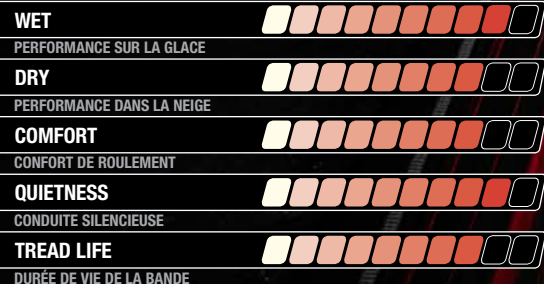

ROADX**RXQUEST HT HX01**

PART NUMBER	SIZE	LI/SR	TD 32/IN.	OD IN.	SW IN.	RW IN.	UTQG	SINGLE MAX LOAD LBS@PSI	DUAL MAX LOAD LBS@PSI
1600210K	235/75R15	105T	11	28.9	9.3	6.5	700 A A	2039@44	
1600209K	235/70R16	106T	11	29.0	9.4	7.0	700 A A	2094@44	
1600213K	245/75R16	111T	11	30.5	9.8	7.0	700 A A	2403@44	
1600217K	265/75R16	116T	11	31.7	10.5	7.5	700 A A	2756@44	
1600211K	235/75R17	109T	11	30.9	9.3	6.5	700 A A	2271@44	
1600212K	245/70R17	110T	11	30.6	9.8	7.0	700 A A	2337@44	
1600216K	265/70R17	115T	11	31.7	10.7	8.0	700 A A	2679@44	
1600214K	255/70R18	113T	11	32.1	10.2	7.5	700 A A	2535@44	
1600215K	265/65R18	114T	11	31.5	10.7	8.0	700 A A	2601@44	
1600220K	275/65R18	116T	11	32.1	11.0	8.0	700 A A	2756@44	
1600218K	275/55R20	117T XL	11	31.9	11.2	8.5	700 A A	2833@50	
1600219K	275/60R20	115T	11	33.0	11.0	8.0	700 A A	2679@44	
1600221K	31X10.50R15	109R	14	30.5	10.6	7.5		2270@50	
1600222K	LT215/85R16	115/112R	14	30.4	8.5	6.0		2680@80	2470@80
1600223K	LT225/75R16	115/112R	14	29.3	8.8	6.0		2680@80	2470@80
1600225K	LT235/85R16	120/116R	14	31.7	9.3	6.5		3042@80	2778@80
1600227K	LT245/75R16	120/116R	14	30.5	9.8	7.0		3042@80	2778@80
1600231K	LT265/75R16	123/120R	14	31.7	10.5	7.5		3415@80	3085@80
1600226K	LT245/70R17	119/116S	14	30.6	9.8	7.0		3000@80	2755@80
1600224K	LT235/80R17	120/117R	14	31.8	9.3	6.5		3085@80	2835@80
1600228K	LT245/75R17	121/118S	14	31.5	9.8	7.0		3195@80	2910@80
1600229K	LT265/70R17	123/120S	14	31.7	10.7	8.0		3415@80	3085@80
1600230K	LT265/70R18	124/121S	14	32.6	10.7	8.0		3525@80	3195@80
1600234K	LT275/70R18	125/122S	14	33.2	11.0	8.0		3640@80	3305@80
1600232K	LT275/65R18	123/120S	14	32.1	11.0	8.0		3415@80	3085@80
1600233K	LT275/65R20	126/123S	14	34.1	11.0	8.0		3750@80	3415@80